



- 1** Open the door and remove the existing magnet by unscrewing the two Philips-head screws and removing the plate.

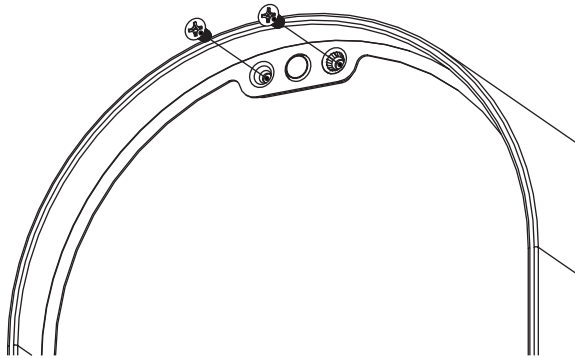

- 2** Replace the magnet on the plate and reattach to the frame using the Philips-head screws.

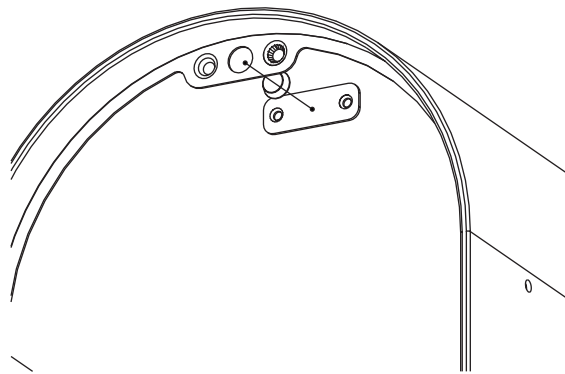

### Questions, Comments, Concerns?

 [www.architecturalmailboxes.com](http://www.architecturalmailboxes.com)

 [support@architecturalmailboxes.com](mailto:support@architecturalmailboxes.com)

### Need keys? Visit us at...

[www.architecturalmailboxes.com/keys](http://www.architecturalmailboxes.com/keys)

Rev. E © 2020, Architectural Mailboxes, LLC

### Find us on social media!



@archmailboxes